


PA AMIX4Z

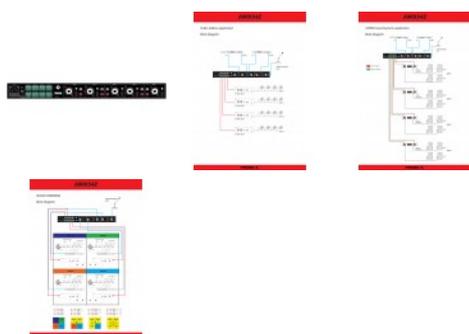

Technical Specifications

Inputs: 1x MIC, 4x LINE
Input Sensitivity: MIC: +4 dBm max / 1 Kohm balanced - LINE: +22 dBm max / 20 Kohm balanced/unbalanced
Signal Output: MASTER, HEADPHONES
Output Levels: MASTER: +22 dBm max / 200 ohm - HEADPHONES: +22 dBm max / 30 ohm min
Controls: 4 INPUTS VOLUME CONTROLS - 4 OUTPUTS VOLUME CONTROLS - 1 HEADPHONES VOLUME CONTROL - ASSIGNMENT INPUTS-ZONES SWITCHES
Frequency response: 20Hz - 20KHz (-3dB)
Distortion (THD): 0.005% (@ Phom 1KHz)
S/N Ratio: > 100dB
Power Supply: 230/12Vac Power supply
Power draw: 10VA
Operating temperature: 0 - 40°C
Input/Output Connectors: MIC: 1x XLR - LINE: 4x RCA L/R - 4x JACK 6.3mm - MASTER: 4x XLR - 4x JACK 6.3mm - HEADPHONES: 1x JACK 6.3mm
Dimensions (W x H x D): 483 x 44 x 105mm - 1 rack unit 19"
Weight: 1.7Kg (3.748 lb)

The AMIX4Z is a compact 19" standard rack unit mixer featuring 4 x 6.3 mm stereo TRS jack inputs and 1 x 3 pole XLR microphone input with phantom 18Vdc power supply.

Category: Public Address » Processors & Mixers

Brand: PROEL
Product Code: PA AMIX4Z

Overview

4x4 MATRIX ROOM COMBINING Proel AMIX4Z is a particular 4 outputs zones mixer designed specifically to comply with Room Combining functions. Such particular application is present in conference rooms and hotels where movable separation are used between different ambients. The audio installation then of these ambients can be set in an independent way or combined in one sole system. AMIX4Z features 4 outputs RCA/Jack 6,3 Lines and one BM100 stand microphone input. Independent setting and volume control for these 5 inputs. The Main Master control can be set throughout headphone output switchable between the four zones outputs. Main features:

- 4 line level channels independent or to be combined in different configurations
- input sensibility control for 4 outputs
- microphone input for microphone general call or microphone call per zone
- headphone output for present signal monitoring

Related Products



PA AMIX63

Prodotti Complementari



PA BM100



PA BM100A



PA BMG2

Technical specifications and appearances are subject to change without notice and accuracy is not guaranteed. All trademarks are the property of their respective owners. PROEL accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colors and specifications may vary from actual product. PROEL products are sold through authorized fullfillers and resellers only. This manual is copyright. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of PROEL -Via alla Ruenia 37/43 -CAP 64027 -San't Omero (TE) ITALY.

For service, support, or more information contact:
Proel S.p.A.
Via alla Ruenia 37/43
CAP 64027 -San't Omero (TE) ITALY

PROEL 